



CANON SOLUTIONS AMERICA

 **imageRUNNER**
1400 SERIES

POWERFUL PRODUCTIVITY IN A COMPACT SIZE

FOR BUSY WORKGROUPS

PERFORMANCE

- Print up to 37 ppm in black and white
- Scan in color/black and white
- Print up to 8-1/2" x 14"
- 1,100-sheet maximum paper capacity

FEATURES

- Copy, print, scan, fax
- High-quality, black-and-white output
- User-friendly, 5-line interface
- Low energy consumption
- Reliable and cost-efficient



Small businesses and corporate workgroups depend on solutions that help maximize resources, boost productivity, and are easy to manage. The cost-efficient imageRUNNER 1400 Series does all that and more. With fast output, scanning, faxing, and high reliability, these multifunction devices let you accomplish a lot in a small space.

VERY EFFICIENT WORKFLOW

Whether you're a small business, part of a workgroup, or a medical practice, the imageRUNNER 1400 Series models can boost operational efficiency. Scan and e-mail documents to clients and colleagues or conveniently scan to/print from a USB memory stick. The ID Card Copy feature easily copies cards and other small, two-sided documents onto the same page. Extend your document management capabilities when you scan using the standard PDF (OCR) format. These models enable mobile workers and offices with the ability to scan to/print from select mobile devices.

A TRUE MULTITASKER

Small enough to fit on a desktop, the imageRUNNER 1400 Series can be used by itself or as part of a larger Canon MFP fleet. Copy, print, scan, fax, and manage documents in sizes up to 8-1/2" x 14". Output images with superb clarity and detail at 1,200 dpi x 600 dpi (enhanced) print resolution. Ideal for printing business documents, these models support Canon UFR II LT, PCL 5e/6, and Adobe® PostScript® 3™.*

REAL SPEED AND EASE

With a first-copy-out time as fast as 6.9 seconds and output up to 37 ppm, the imageRUNNER 1400 Series is a quick performer. Scan documents in black and white and color to e-mail addresses or networked locations. The highly visible, 5-line display simplifies use. The standard 600-sheet capacity can be increased to 1,100 sheets to handle many jobs without interruption.



* PCL 5e/6 and Adobe® PostScript® 3™ is standard on the imageRUNNER 1435iF/1435P models, optional on the imageRUNNER 1435i model.



EFFICIENT PERFORMANCE

Designed with your bottom line in mind, the Canon imageRUNNER 1400 Series helps minimize costs and maximize reliability, while the robust design helps ensure long, dependable operation. Canon's uniFLOW® software helps control costs by managing, tracking, and charging back usage. And simple-to-replace, high-yield consumables help keep work moving while achieving a lower cost per page.

SMART MANAGEMENT

An ideal replacement for single-function printers or older models, the imageRUNNER 1400 Series easily integrates into your network of imageRUNNER devices to streamline and simplify management and maintenance. Even receive alerts when supplies or service calls are needed with imageWARE Enterprise Management Console and plug-ins.



SECURITY SOLUTIONS

Safeguard information and help ensure security compliance with the imageRUNNER 1400 Series. Canon's uniFLOW solution lets users securely retrieve documents from any networked device. AuSend restricts scanning and sending capabilities only to authorized users. TX Archiving automatically forwards a copy of a fax to an administrator-defined destination. And with no hard disks in these models, there are no latent images.



ECO-CONSCIOUS DESIGN

The imageRUNNER 1400 Series meets ENERGY STAR® standards and has a low TEC (Total Energy Consumption) rating. EPEAT® rated, these models follow Canon's stringent Green Procurement policy and environmental commitments.

SPECIFICATIONS

MAIN UNIT

System Type

1435iF/1435i: Digital Multifunction Imaging System
1435P: Digital Laser Printer

Operation Panel: 5-line LCD

Memory: RAM 512 MB;
Standard USB Port

Network Interface Connectors

Standard: 1000Base-T, 100Base-TX, 10Base-T
Other: USB2.0 x1 (Host), USB1.1 x1 (Host),
USB (Device)

Copy/Print Speed (BW)

Letter: Up to 37 ppm
Legal: Up to 25 ppm

Engine Resolution

600 dpi x 600 dpi; 1200 dpi x 600 dpi (Enhanced)

First-Copy-Out Time (Letter)

1435iF/1435i: As fast as 6.9 Seconds

First-Print-Out Time (Letter)

As fast as 5.0 Seconds

Paper Sources (20 lb. Bond)

Standard: 500-sheet Cassette
100-sheet Bypass
Optional: 500-sheet Cassette
Maximum: 1,100 Sheets

Output Capacity (20 lb. Bond)

Maximum: 100 Sheets

Output Paper Size

Cassette: Letter, Legal
Bypass: Letter, Legal, Statement, Executive,
Custom Size (3" x 5" to 8-1/2" x 14"),
Envelope (C5/DL/COM-10/Monarch)

Acceptable Paper Weights

Cassette: 17 lb. Bond to 24 lb. Bond
(64 to 90 g/m²)
Bypass: 16 lb. Bond to 34 lb. Bond
(60 to 128 g/m²)

Warm-Up Time

From Power On: 20 Seconds or Less
From Sleep Mode: 7.8 Seconds or Less

Power Requirements/Plug

120 - 127 V AC, 60 Hz, 7.8 A/NEMA 5-15P

Sleep Mode: 2.0 W or Less

Dimensions (H x W x D)

1435iF/1435i: 18-3/4" x 21-1/2" x 18"
(475.3 mm x 545 mm x 457 mm)
1435P: 15-1/8" x 21-1/2" x 18"
(382.5 mm x 545 mm x 457 mm)

Weight

1435iF/1435i: Approx. 52.3 lb. (23.74 kg)
1435P: Approx. 47.3 lb. (21.44 kg)

Toner:

17,600 Images
(Estimated Yield @ 6% Coverage)

Max. Copy/Print Size (Platen)

8-1/2" x 14" (215.9 mm x 355.6 mm)

DOCUMENT FEEDER (1435iF/1435i only)

Scan Method

Duplexing Automatic Document Feeder

Acceptable Originals: 5-1/2" x 5" to 8-1/2" x 14"

Scan Speed (Letter)

Simplex: Up to 29 ipm (BW)/10 ipm (Color)
Duplex: Up to 10 ipm (BW)/6 ipm (Color)

Paper Capacity: Up to 50 Sheets (20 lb. Bond)

PDL SUPPORT

Standard: UFR II LT

Standard (1435iF/1435P): PCL 5e/6, and Adobe PS 3

Optional (1435i): PCL 5e/6, and Adobe PS 3

Optional: Barcode Printing Kit

UNIVERSAL SEND (1435iF/1435i only)

Sending Method

E-mail, USB, File Server (FTP, SMB)

Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP)
E-mail: SMTP, POP3

File Format

Standard: TIFF, JPEG, PDF, PDF (Compact),
PDF (Compact/OCR), PDF (OCR)
Optional: Encrypted PDF, Digital Signature PDF

FAX SPECIFICATIONS (1435iF only)

Maximum Number of Connection Lines: 1

Modem Speed

Super G3: 33.6 Kbps
G3: 14.4 Kbps


SECURITY SPECIFICATIONS

Standard

Department ID Management, IPv6, Restricting Features
(Restricting New Addresses on Address Book, Allow
Fax Driver TX, Restrict Recall, Confirm Entered Fax
Numbers, Restrict Sequential Broadcast, Restrict
USB Interface), Memory Lock, MAC/IP Address
Filtering, SMTP Authentication, POP Authentication
before SMTP, IEEE802.1x, Authentication Feature for
Send Operation (AuSend), Secured Print, SNMP v1/v3,
SSL Encrypted Communication, Fax Forwarding, Fax
Destination Confirmation, USB Block, TLS Support
for E-mail, Fax TX Archive

Optional

Encrypted PDF, Digital Signature PDF, uniFLOW

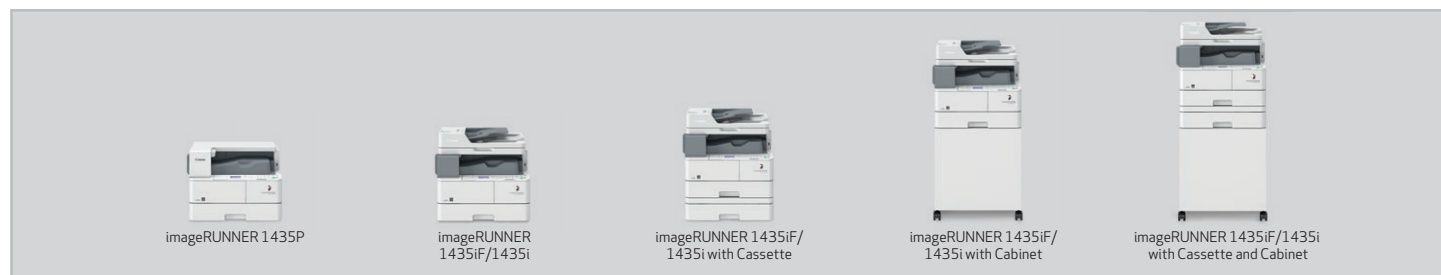

For more information, call or visit
1.800.815.4000 CSA.CANON.COM

Canon
CANON SOLUTIONS AMERICA

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has qualified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Canon, imageRUNNER, imageWARE, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.
©2015 Canon U.S.A., Inc. All rights reserved.

